

Next & NextStar

SATELLITE SYSTEM
2026
PRODUCT
CATALOGUE



4 SAT + MDU + TERR

17/32 ➤ HYBRID



17/24 ➤ HYBRID



17/20 ➤ HYBRID



NEW HYBRID SYSTEMS
TERMINAL & CASCADE
TOGETHER




17/16 ➤ HYBRID



17/12 ➤ HYBRID



17/8 ➤ HYBRID



Faster Channel Zapping
with 32 Bit High Speed CPU



Better signal performance with 30dB,
High Gain, Low Noise IF amplifier on
every TAP output.

DiSEqC 2.0	INPUTS	4SAT+1TERR						
	PASS OUTPUT	4SAT+1TERR						
	TAP OUTPUT	32	24	20	16	12	8	
	TERRESTRIAL	BAND FREQUENCY						
		80-862MHz						
		TAP LOSS (SW. PASSIVE)						
		22dB						
		TAP LOSS (SW. ACTIVE)						
		3dB						
		MAX. OUTPUT LEVEL (DIN 45004 B)						
SATELLITE		93dBuV						
		PASS OUTPUT LOSS TER (PASSIVE)						
		10db						
		PASS OUTPUT LOSS TER (ACTIVE)						
		10db (positive gain)						
		ISOLATION SAT/TER						
		>40						
POWER SUPPLY		ISOLATION TER/SAT						
		>40						
		FREQUENCY						
		950-2200MHz						
		TAP GAIN						
		4dB						
		MAX OUTPUT LEVEL (EN-5083-3)						
EXTERNAL		105dBuV						
		7dB	6dB	5dB	7dB	6dB	5dB	
		PASS OUTPUT LOSS SAT (2.2GHZ)						
		>30						
		ISOLATION H/V						
		>40						
		ISOLATION SAT/SAT						
		>40						
		INPUT						
		90-260V / 50HZ						
		OUTPUT						
		16V-2A						



3 SAT + MDU + TERR

14/32 HYBRID



14/24 HYBRID



14/20 HYBRID



NEW HYBRID SYSTEMS
TERMINAL & CASCADE
TOGETHER




14/16 HYBRID



14/12 HYBRID



14/8 HYBRID



Faster Channel Zapping
with 32 Bit High Speed CPU



Better signal performance with 30dB,
High Gain, Low Noise IF amplifier on
every TAP output.

DiSeQC 2.0	INPUTS	3SAT+1TERR													
	PASS OUTPUT	3SAT+1TERR													
	TAP OUTPUT	32		24		20		16		12		8			
	TERRESTRIAL	BAND FREQUENCY		80-862MHz											
		TAP LOSS (SW. PASSIVE)		22dB											
		TAP LOSS (SW. ACTIVE)		3dB											
		MAX. OUTPUT LEVEL (DIN 45004 B)		93dBuV											
		PASS OUTPUT LOSS TER (PASSIVE)		10db											
		PASS OUTPUT LOSS TER (ACTIVE)		10db (positive gain)											
		ISOLATION SAT/TER		>40											
		ISOLATION TER/SAT		>40											
	SATELLITE	FREQUENCY		950-2200MHz											
		TAP GAIN		4dB											
		MAX OUTPUT LEVEL (EN-5083-3)		105dBuV											
		PASS OUTPUT LOSS SAT (2.2GHZ)		7dB		6dB		5dB		7dB		6dB		5dB	
		ISOLATION H/V		>30											
		ISOLATION SAT/SAT		>40											
	POWER SUPPLY	INPUT	90-260V / 50HZ												
	EXTERNAL	OUTPUT	16V-2A												



2 SAT + MDU + TERR

10/48 HYBRID



10/40 HYBRID



10/32 HYBRID



NEW HYBRID SYSTEMS
**TERMINAL & CASCADE
TOGETHER**


10/24 HYBRID



10/16 HYBRID



10/8 HYBRID



Faster Channel Zapping
with 32 Bit High Speed CPU



Better signal performance with 30dB,
High Gain, Low Noise IF amplifier on
every TAP output.

DiSeqC 2.0


INPUTS		2SAT+1TERR					
PASS OUTPUT		2SAT+1TERR					
TAP OUTPUT		48	40	32	24	16	8
TERRESTRIAL	BAND FREQUENCY	80-862MHz					
	TAP LOSS (SW. PASSIVE)	22dB					
	TAP LOSS (SW. ACTIVE)	3dB					
	MAX. OUTPUT LEVEL (DIN 45004 B)	93dBuV					
	PASS OUTPUT LOSS TER (PASSIVE)	10db					
	PASS OUTPUT LOSS TER (ACTIVE)	10db (positive gain)					
	ISOLATION SAT/TER	>40					
	ISOLATION TER/SAT	>40					
SATELLITE	FREQUENCY	950-2200MHz					
	TAP GAIN	4dB					
	MAX OUTPUT LEVEL (EN-5083-3)	105dBuV					
	PASS OUTPUT LOSS SAT (2.2GHZ)	7dB	6dB	5dB	7dB	6dB	5dB
	ISOLATION H/V	>30					
	ISOLATION SAT/SAT	>40					
POWER SUPPLY	INPUT	90-260V / 50HZ					
EXTERNAL	OUTPUT	16V-2A					



IF / AMPLIFIER




Next YE-1720 (17/17) IF Amplifier

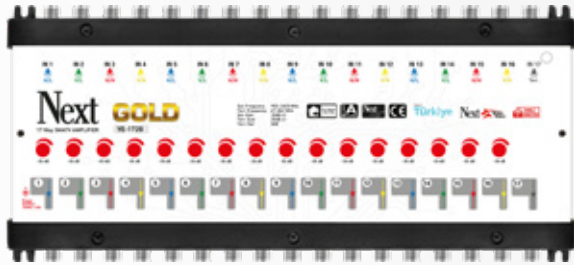

IF / AMPLIFIER

INPUTS	16 SAT + 1 TERR
OUTPUT	14/14
INPUT FREQUENCY RANGE	
TERRESTRIAL	47-862 MHz
SATELLITE	950-2250 MHz
TERR. GAIN	Pasif
SAT. GAIN	16 - 30 dB
OUTPUT SAT (IMA3)	105 - 108 dBuV
SAT-SAT ISOLATION	28 dB
SAT-LOCAL ISOLATIO	>1 dB
RF CONNECTOR	F CONNECTOR
MAX. POWER CONSUMPTION	1000 mA

Next YE-1420 (14/14) IF Amplifier

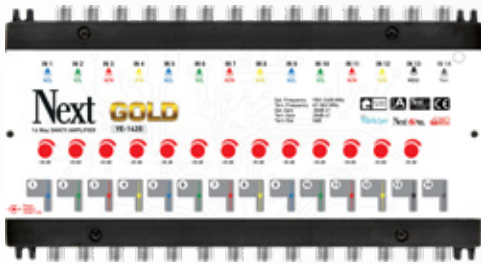

IF / AMPLIFIER


INPUTS	13 SAT + 1 TERR
OUTPUT	14/14
INPUT FREQUENCY RANGE	
TERRESTRIAL	47-862 MHz
SATELLITE	950-2250 MHz
TERR. GAIN	Pasif
SAT. GAIN	16 - 30 dB
OUTPUT SAT (IMA3)	105 - 108 dBuV
SAT-SAT ISOLATION	28 dB
SAT-LOCAL ISOLATIO	>1 dB
RF CONNECTOR	F CONNECTOR
MAX. POWER CONSUMPTION	1000 mA

Next YE-1020 (10/10) IF Amplifier



IF / AMPLIFIER

INPUTS	9 SAT + 1 TERR
OUTPUT	10/10
INPUT FREQUENCY RANGE	
TERRESTRIAL	47-862 MHz
SATELLITE	950-2250 MHz
TERR. GAIN	Pasif
SAT. GAIN	16 - 30 dB
OUTPUT SAT (IMA3)	105 - 108 dBuV
SAT-SAT ISOLATION	28 dB
SAT-LOCAL ISOLATIO	>1 dB
RF CONNECTOR	F CONNECTOR
MAX. POWER CONSUMPTION	1000 mA

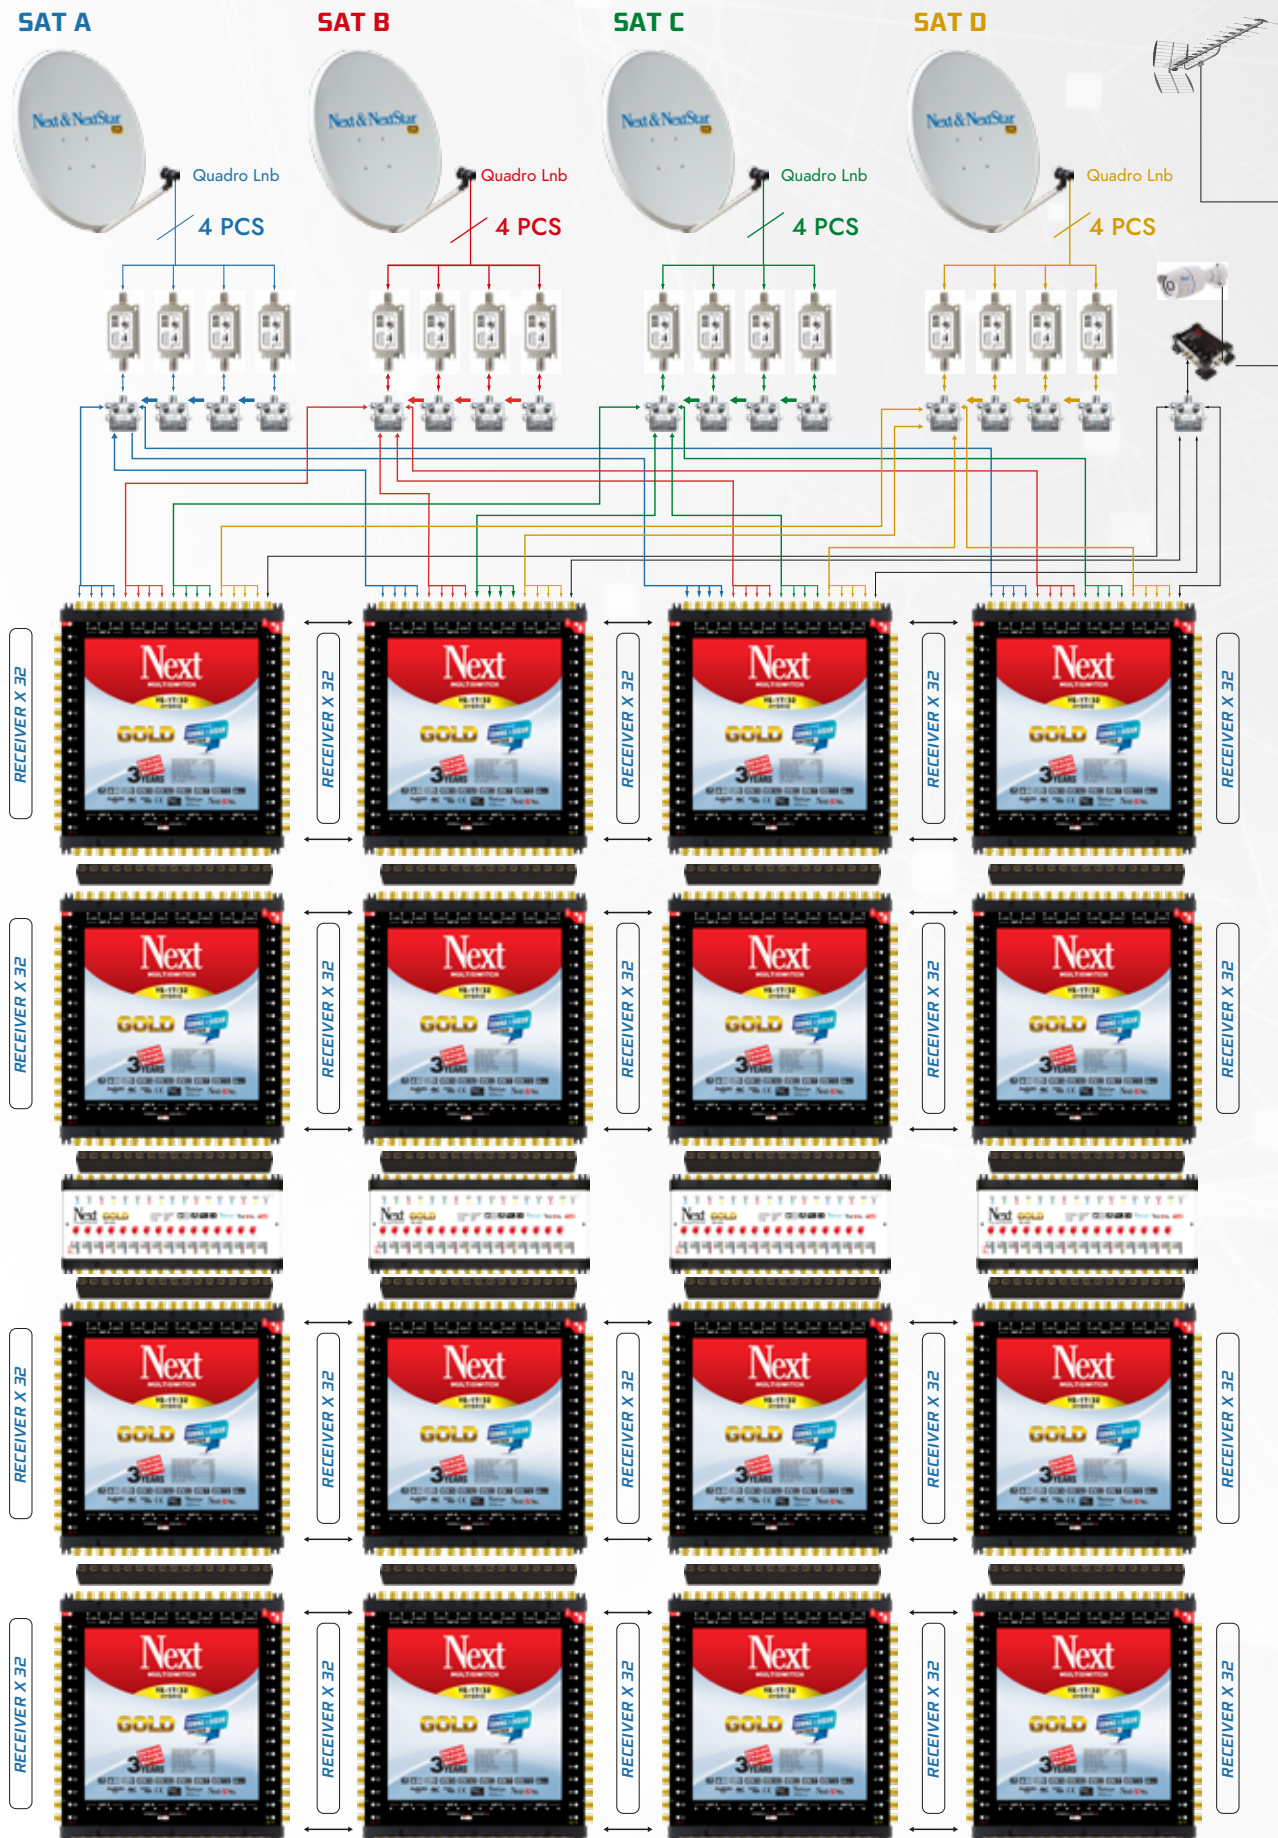HYBRID MULTISWITCH SYSTEM WITH
4 SAT. 1 TERR. / 1 CAMERADIAGRAM of DISRIBUTION
for 512 APARTMENTS


**DIAGRAM of DISRIBUTION
for 108 APARTMENTS**



FIBER OPTIC TRANSMITTER SIGNAL DISTRIBUTION

T-4000 PLUS 16 POLARITY + TERRESTRIAL IF & RF DISTRIBUTION

4 SATELLITE / 16x IF 1xRF SINGLE CORE OPTIC TRANSMITTER

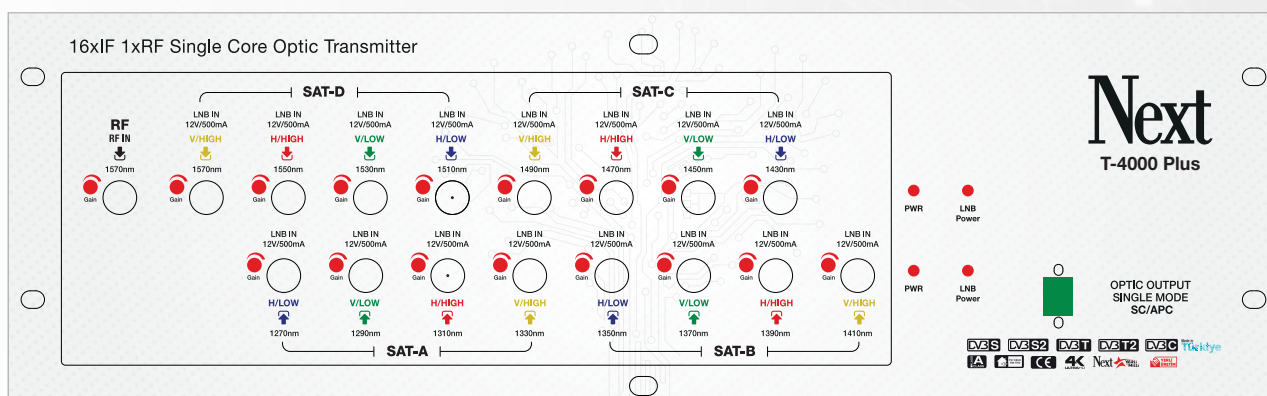

FEATURES

- 4 Satellite / 16 Polarity Quatro / C Band / MDU LNB support.
- 18V/500mA LNB supply for each input with short circuit protection.
- Individual Gain adjustment for each Satellite and Terrestrial input.
- IF signal LED indicator for each input (LED is lighting over 70dBuV of input signal).
- Single Core, Single Mode, SC/APC connector output.
- No Cooling Fan is required (Minimize the maintenance cost with Non Cooling Laser Technology).


OPTIC TRANSMITTER

MODEL	T-4000-Plus
INPUT	16SAT+1TERR
OUTPUT	1 X SC/APC
TERRESTRIAL	BAND FREQUENCY TERR. GAIN (ATV, DVBC2, DVBT2) MAX. INPUT LEVEL GAIN ADJUSTMENT RF INDICATOR OPTIC WAVELENGTH OPTIC POWER FREQUENCY
	80-862MHz 22dB 93dBuV 25dB 1270nm (CVDM) Standart : 2mW. Optional: 5mW / 10mW 950-2200MHz
SATELLITE	SAT. GAIN MAX. INPUT LEVEL GAIN ADJUSTMENT IF INDICATOR OPTIC WAVELENGTH OPTIC POWER
	22dB 105dBuV 25dB YES 1270-1570nm (CVDM)
POWER SUPPLY	INPUT
	90-260V/50HZ

FIBER OPTIC TRANSMITTER SIGNAL DISTRIBUTION

T-3000 PLUS 12 POLARITY + TERRESTRIAL IF & RF DISTRIBUTION

3 SATELLITE / 12x IF 1xRF SINGLE CORE OPTIC TRANSMITTER

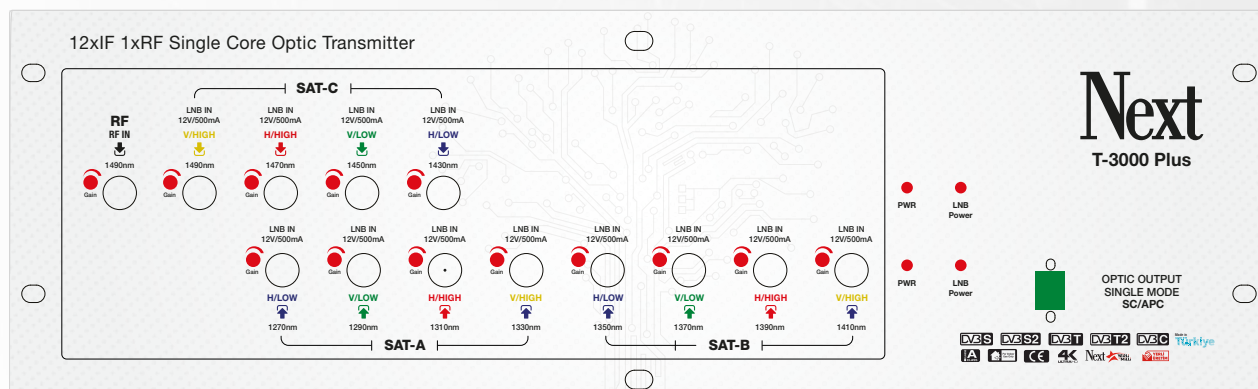

FEATURES

- 3 Satellite / 12 Polarity Quatro / C Band / MDU LNB support.
- 18V/500mA LNB supply for each input with short circuit protection.
- Individual Gain adjustment for each Satellite and Terrestrial input.
- IF signal LED indicator for each input (LED is lighting over 70dBuV of input signal).
- Single Core, Single Mode, SC/APC connector output.
- No Cooling Fan is required (Minimize the maintenance cost with Non Cooling Laser Technology).


OPTIC TRANSMITTER

MODEL	T-3000-Plus
INPUT	12SAT+1TERR
OUTPUT	1 X SC/APC
TERRESTRIAL	BAND FREQUENCY TERR. GAIN (ATV, DVBC2, DVBT2) MAX. INPUT LEVEL GAIN ADJUSTMENT RF INDICATOR OPTIC WAVELENGTH OPTIC POWER FREQUENCY
	80-862MHz 22dB 93dBuV 25dB 1270nm (CVDM) Standart : 2mW. Optional: 5mW / 10mW 950-2200MHz
SATELLITE	SAT. GAIN MAX. INPUT LEVEL GAIN ADJUSTMENT IF INDICATOR OPTIC WAVELENGTH OPTIC POWER
	22dB 105dBuV 25dB YES 1270-1570nm (CVDM)
POWER SUPPLY	INPUT
	90-260V/50HZ

FIBER OPTIC TRANSMITTER SIGNAL DISTRIBUTION

T-2000 PLUS 9 POLARITY + TERRESTRIAL IF & RF DISTRIBUTION

2 SATELLITE / 9x IF 1xRF SINGLE CORE OPTIC TRANSMITTER

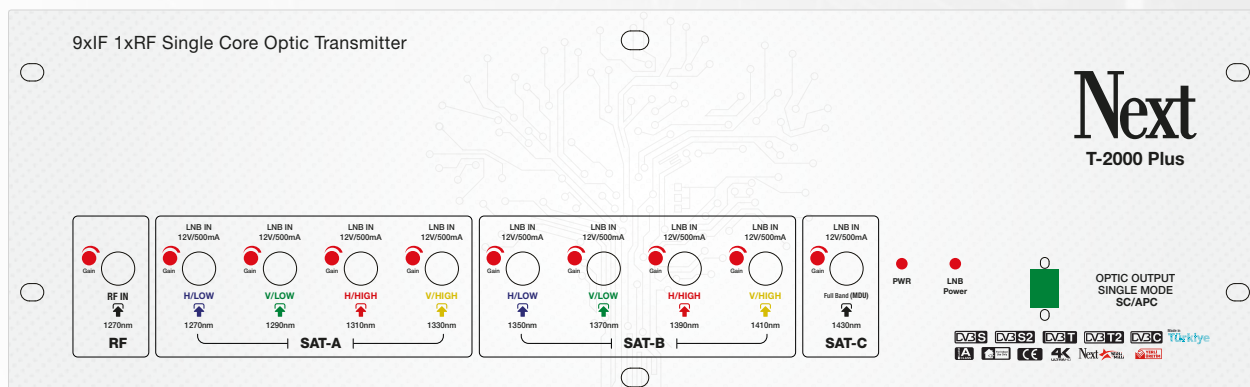


FEATURES

- 2 Satellite / 9 Polarity Quatro / C Band / MDU LNB support.
- 18V/500mA LNB supply for each input with short circuit protection.
- Individual Gain adjustment for each Satellite and Terrestrial input.
- IF signal LED indicator for each input (LED is lighting over 70dBuV of input signal).
- Single Core, Single Mode, SC/APC connector output.
- No Cooling Fan is required (Minimize the maintenance cost with Non Cooling Laser Technology).

OPTIC TRANSMITTER

MODEL		T-2000-Plus
INPUT		9SAT+1TERR
OUTPUT		1 X SC/APC
TERRESTRIAL	BAND FREQUENCY	80-862MHz
	TERR. GAIN (ATV, DVBC2, DVBT2)	22dB
	MAX. INPUT LEVEL	93dBuV
	GAIN ADJUSTMENT	25dB
	RF INDICATOR	
	OPTIC WAVELENGHT	1270nm (CVDM)
	OPTIC POWER	Standart : 2mW. Optional:5mW / 10mW
	FREQUENCY	950-2200MHz
	SAT. GAIN	22dB
SATELLITE	MAX. INPUT LEVEL	105dBuV
	GAIN ADJUSTMENT	25dB
	IF INDICATOR	YES
	OPTIC WAVELENGHT	1270-1570nm (CVDM)
	OPTIC POWER	
POWER SUPPLY	INPUT	90-260V/50HZ

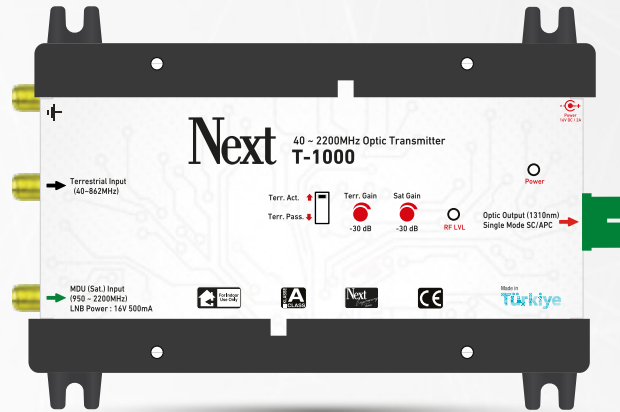FIBER OPTIC TRANSMITTER
SIGNAL DISTRIBUTIONT-1000
1 IF + 1 RF 40-2200MHz1 IF + 1 RF 40-2200MHz
OPTIC TRANSMITTER

FEATURES

- 1 IF + 1 RF 40-2200MHz Optic Transmitter

OPTIC TRANSMITTER	MODEL	T-1000
	INPUTS	SC/APC
	PASS OUTPUT	1SAT+1TERR
	TERRESTRIAL	BAND FREQUENCY
		80-862MHz
		MAX. OUTPUT LEVEL (DIN 45004 B)
		93dBuV
		ISOLATION SAT/TER
		>40
		ISOLATION TER/SAT
		>40
	SATELLITE	FREQUENCY
		950-2200MHz
		TAP LOSS
		0dB
		MAX OUTPUT LEVEL (EN-5083-3)
		105dBuV
		ISOLATION H/V
		>30
		ISOLATION SAT/SAT
		>40
	POWER SUPPLY	INPUT
		90-260V/50HZ
	EXTERNAL	OUTPUT
		16V-2A

FIBER OPTIC RECEIVER SIGNAL DISTRIBUTION

R-4000 16 POLARITY + TERRESTRIAL IF & RF DISTRIBUTION

4 SATELLITE / 16 POLARITY + RF, FIBER OPTIC RECEIVER



FEATURES

- 4 Satellite / 16 Polarity Single Core, SC/APC optic receiver.
- Individual Gain adjustment for each Satellite and Terrestrial Output.
- IF signal LED indicator for each IF Output (LED is lighting over 70dBuV of input signal).
- MDU LNB support

OPTIC RECEIVER	MODEL	R-4000
	INPUTS	SC/APC
	PASS OUTPUT	4SAT+1TERR
	TERRESTRIAL	BAND FREQUENCY
		80-862MHz
		TAP LOSS (SW. PASSIVE)
		22dB
		TAP LOSS (SW. ACTIVE)
		3dB
		MAX. OUTPUT LEVEL (DIN 45004 B)
		93dBuV
		PASS OUTPUT LOSS TER (PASSIVE)
		10db
		PASS OUTPUT LOSS TER (ACTIVE)
		10db (positive gain)
		ISOLATION SAT/TER
		>40
		ISOLATION TER/SAT
		>40
SATELLITE	FREQUENCY	950-2200MHz
	TAP LOSS	0dB
	MAX OUTPUT LEVEL (EN-5083-3)	105dBuV
	ISOLATION H/V	>30
	ISOLATION SAT/SAT	>40
POWER SUPPLY	INPUT	90-260V/50HZ
	OUTPUT	16V-2A

FIBER OPTIC RECEIVER SIGNAL DISTRIBUTION

R-3000 13 POLARITY + TERRESTRIAL IF & RF DISTRIBUTION

3 SATELLITE / 13 POLARITY + RF, FIBER OPTIC RECEIVER



FEATURES

- 3 Satellite / 13 Polarity Single Core, SC/APC optic receiver.
- Individual Gain adjustment for each Satellite and Terrestrial Output.
- IF signal LED indicator for each IF Output (LED is lighting over 70dBuV of input signal).
- MDU LNB support

OPTIC RECEIVER	MODEL	R-3000
	INPUTS	SC/APC
	PASS OUTPUT	3SAT+1TERR
	TERRESTRIAL	
	BAND FREQUENCY	80-862MHz
	TAP LOSS (SW. PASSIVE)	22dB
	TAP LOSS (SW. ACTIVE)	3dB
	MAX. OUTPUT LEVEL (DIN 45004 B)	93dBuV
	PASS OUTPUT LOSS TER (PASSIVE)	10db
	PASS OUTPUT LOSS TER (ACTIVE)	10db (positive gain)
	ISOLATION SAT/TER	>40
	ISOLATION TER/SAT	>40
	SATELLITE	
	FREQUENCY	950-2200MHz
	TAP LOSS	0dB
	MAX OUTPUT LEVEL (EN-5083-3)	105dBuV
	ISOLATION H/V	>30
	ISOLATION SAT/SAT	>40
	POWER SUPPLY	INPUT
	ETHERNET	OUTPUT
		90-260V/50HZ
		16V-2A

FIBER OPTIC RECEIVER SIGNAL DISTRIBUTION

R-2000 GOLD Plus 9 POLARITY + TERRESTRIAL IF & RF DISTRIBUTION

2 SATELLITE / 9 POLARITY + RF, FIBER OPTIC RECEIVER




FEATURES

- 2 Satellite / 9 Polarity Single Core, SC/APC optic receiver.
- Individual Gain adjustment for each Satellite and Terrestrial Output.
- IF signal LED indicator for each IF Output (LED is lighting over 70dBuV of input signal).
- MDU LNB support

OPTIC RECEIVER

MODEL		R-2000
INPUTS		SC/APC
PASS OUTPUT		2SAT+1TERR
TERRESTRIAL	BAND FREQUENCY	80-862MHz
	TAP LOSS (SW. PASSIVE)	22dB
	TAP LOSS (SW. ACTIVE)	3dB
	MAX. OUTPUT LEVEL (DIN 45004 B)	93dBuV
	PASS OUTPUT LOSS TER (PASSIVE)	10db
	PASS OUTPUT LOSS TER (ACTIVE)	10db (positive gain)
	ISOLATION SAT/TER	>40
	ISOLATION TER/SAT	>40
SATELLITE	FREQUENCY	950-2200MHz
	TAP LOSS	0dB
	MAX OUTPUT LEVEL (EN-5083-3)	105dBuV
	ISOLATION H/V	>30
	ISOLATION SAT/SAT	>40
POWER SUPPLY	INPUT	90-260V/50HZ
ETHERNET	OUTPUT	16V-2A

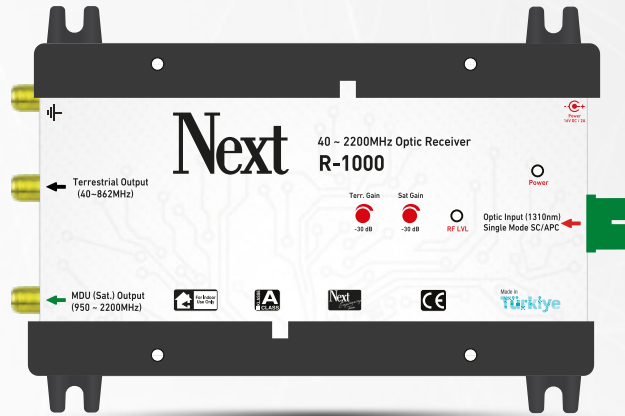FIBER OPTIC RECEIVER
SIGNAL DISTRIBUTIONR-1000
1 IF + 1 RF 40-2200MHz1 IF + 1 RF 40-2200MHz
OPTIC RECEIVER

FEATURES


- 1 IF + 1 RF 40-2200MHz Optic Receiver

OPTIC TRANSMITTER	MODEL	R-1000
	INPUTS	SC/APC
	PASS OUTPUT	1SAT+1TERR
	TERRESTRIAL	BAND FREQUENCY
		80-862MHz
		MAX. OUTPUT LEVEL (DIN 45004 B)
		93dBuV
		ISOLATION SAT/TER
		>40
		ISOLATION TER/SAT
		>40
	SATELLITE	FREQUENCY
		950-2200MHz
		TAP LOSS
		0dB
		MAX OUTPUT LEVEL (EN-5083-3)
		105dBuV
		ISOLATION H/V
		>30
		ISOLATION SAT/SAT
		>40
	POWER SUPPLY	INPUT
		90-260V/50HZ
	EXTERNAL	OUTPUT
		16V-2A

FIBER OPTIC SIGNAL DISTRIBUTION



This sample illustration shows the basic installation diagram. It is possible to distribute up to 10,000 apartment using single optic transmitter device.

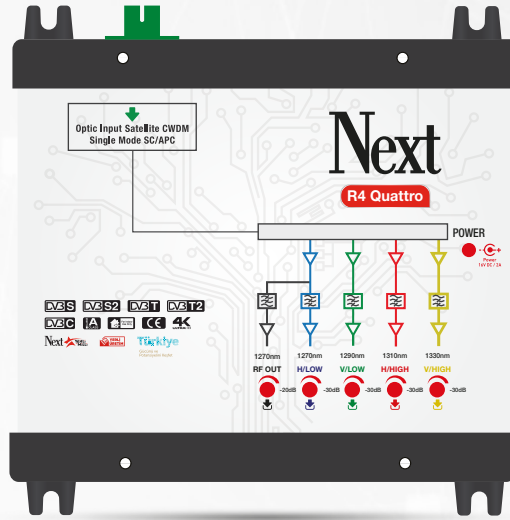FIBER OPTIC RECEIVER
SIGNAL DISTRIBUTIONR4 Quattro
1 IF + 1 RF 40-2200MHz1 IF + 1 RF 40-2200MHz
OPTIC RECEIVER

FEATURES


- 1 Satellite / 4 Polarity Single Core, SC/APC optic receiver.
- Individual Gain adjustment for each Satellite and RF Output.
- IF signal LED indicator for each IF Output (LED is lighting over 70dBuV of input signal)

OPTIC TRANSMITTER	MODEL	R4 QUATTRO
	INPUTS	SC/APC
	PASS OUTPUT	4SAT POLARITY + 1TERR
	TERRESTRIAL	BAND FREQUENCY
		80-862MHz
		MAX. OUTPUT LEVEL (DIN 45004 B)
		93dBuV
		ISOLATION SAT/TER
		>40
		ISOLATION TER/SAT
		>40
	SATELLITE	FREQUENCY
		950-2200MHz
		TAP LOSS
		0dB
OPTIC TRANSMITTER	MAX OUTPUT LEVEL (EN-5083-3)	105dBuV
	ISOLATION H/V	>30
	ISOLATION SAT/SAT	>40
	POWER SUPPLY	INPUT
EXTERNAL		90-260V/50HZ
	OUTPUT	16V-2A

FIBER OPTIC RECEIVER SIGNAL DISTRIBUTION

T4 Quattro
1 IF + 1 RF 40-2200MHz

1 IF + 1 RF 40-2200MHz
OPTIC RECEIVER

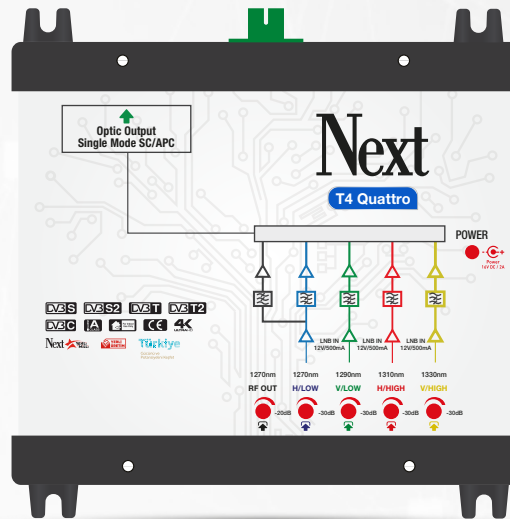

FEATURES

- 1 Satellite / 4 Polarity Quattro / C Band
- 18V/500mA LNB supply for each input with short circuit protection.
- Individual Gain adjustment for each Satellite and RF input.
- IF signal LED indicator for each input (LED is lighting over 70dBuV of input signal).
- Single Core, Single Mode, SC/APC connector output.
- No Cooling Fan is required (Minimize the maintenance cost with Non Cooling Laser Technology)

OPTIC TRANSMITTER	MODEL	T4 QUATTRO
	INPUTS	4SAT POLARITY + 1TERR
	PASS OUTPUT	1 X SC/APC
	TERRESTRIAL	BAND FREQUENCY
		80-862MHz
		MAX. OUTPUT LEVEL (DIN 45004 B)
		93dBuV
		ISOLATION SAT/TER
		>40
		ISOLATION TER/SAT
		>40
	SATELLITE	FREQUENCY
		950-2200MHz
		TAP LOSS
		0dB
		MAX OUTPUT LEVEL (EN-5083-3)
		105dBuV
		ISOLATION H/V
		>30
		ISOLATION SAT/SAT
		>40
	POWER SUPPLY	INPUT
		90-260V/50HZ
	EXTERNAL	OUTPUT
		16V-2A

Next YE-3542 D QPSK-QAM-TRANSMODULATOR

QPSK - QAM TRANSMODULATOR

19" 1U 4 Transponder/with CI Module Plug & Play
QPSK - QAM Transmodulator



TECHNICAL SPECIFICATIONS

A device that allows audio and video signal input in TV distributions with applications in home entertainment, Digital Signage for hotels, shops, restaurants etc.


- 4x4 CI QAM Modulator
- 4xDVB-S/S2 Input CI Tuner, 4xQAM (DVB-C) RF Output Modulator
- Excellent RF Output Performance. MER>40dB
- BISS Decoding Feature, Accurate PCR Tuning Support
- PSI/SI Editing and Adding Support, PID Remapping
- LED Indicator and Keypad Support
- WEB Remote Access Support
- WEB and USB Update Support

GENERAL DESCRIPTION

YE-3542 D multi-input modulator is NEXT's all-in one device which integrates demodulation, trans-mux and modulation in one case to convert signals into RF output. It is a 1-U case which supports 4 tuner inputs to receive signal from satellite, cable or terrestrial. To meet customers' various requirements, YE-3542 D is also equipped with 2 ASI input, and output with 2 groups of separate ASI ports and 2 MPTS UDP IP port. The output modulated signals are to be received by TVs, STB and etc.

The USB port is designed to record encoded video (TS) and save it in ts files in the USB Keys or Hard Disks, and then the ts files can be playback through the USB port.

The four CAMs/CIs (Optional) accompanied and BISS modules can descramble the programs input from 4 Tuner inputs. Its pluggable structure design greatly facilitates the change of modules (demodulator) as needed.

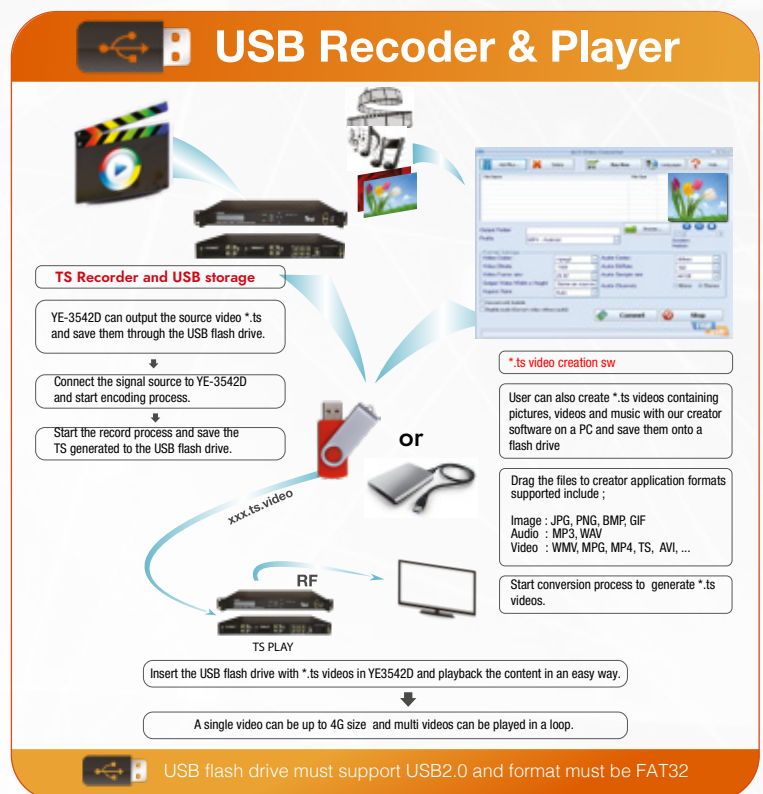

QAM MODULATOR

Next **YE-334303**
DVB-C QAM Modulator


TECHNICAL SPECIFICATIONS

- 8x4 FTA QAM Modulator
- 8xDVB-S/S2 Input FTA Tuner, 4xQAM (DVB-C) RF Output Modulator
- Excellent RF Output Performance. MER>40dB
- PSI/SI Editing and Adding Supports, PID Remapping
- LED Indicator and Keypad Support
- Remote Access Support from WEB
- Update Support from WEB and USB

Next **YE-3394C**
DVB-C QAM Modulator

TECHNICAL SPECIFICATIONS

- 16x16 FTA QAM Modulator
- 16xDVB-S/S2 Input FTA Tuner, 16xQAM (DVB-C) RF Output Modulator
- 1Excellent RF Output Performance. MER>40dB
- 1PSI/SI Editing and Adding Supports, PID Remapping
- 1Remote Access Support from WEB
- 1Update Support from WEB and USB

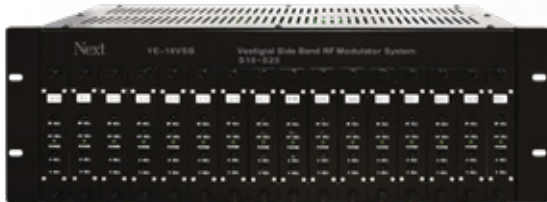Next **YE-16VSB (510-525/526-541)**
Rack Type 16 Fixed Channel Single Side Band
AV Modulator

TECHNICAL SPECIFICATIONS

- Used to convert Audio/Video Signals to VHF-UHF Band Channels
- Professional 19" Rack Cabinet includes 16 VSB modulators and SMPS Power Supply kit
- All settings can be made with the LED indicator and control keys on the front panel
- 100% Turkish engineering and design
- Thanks to cooling fans, it can be operated safely, stably and with long life
- It can use consecutive channels thanks to Single Side Band (VSB modulators)
- 1Independent 16 modules can be easily replaced during service
- It has a low C/N (Carrier/Noise) ratio

ATTENTION!:

Please contact your sales representative to select the appropriate model for your project.

MODULATOR /AMPLIFIER

Next YE-840 HD QSPK

8 Modulator

TECHNICAL SPECIFICATIONS

- Used to Convert Satellite Signals to Audio and Image.
- 4 Channel QPSK-Video/Audio Demodulator in Professional 19" Rack Cabinet
- 24 Channel RCA Output
- Separate Settings Can Be Made with Remote Control from Front Panel.
- 100% Turkish Engineering and Design
- DiSEqC 1.0, 1.2 Compatible, Suitable for Signal Input from Multiswitch.
- Perfect Compatibility with Single Sideband (VSB) Modulators with Audio/Video Output



Next YE-860S1

45-860 MHz Line Amplifier

TECHNICAL SPECIFICATIONS

- Nominal Gain : 32dB
- Output Modes : 1- way coupler veya 2-way splitter
- Output Level : $\geq 110\text{dBu}$
- Equalizer Range : 0~20dB
- Attenuation Adjustment : 0~20dB
- In-Band Ripple : $\leq \pm 0.75\text{dB}$
- Return Loss : $\geq 16@87\sim 550\text{MHz} \geq 14@550\sim 862\text{MHz}$
- C/CSO : 60dB
- C/CTB : 61dB
- Noise Factor : 9dB
- Supply : 220V/AC
- Power Consumption : 12W

CURRENT AND
LIGHTNING PROTECTED

Next YE-801 HD

HDMI Input RF Modulator

TECHNICAL SPECIFICATIONS

- Full Band (RF) Modulator with HDMI Input
- Converts HDMI Signals to Analog RF Channels.
- AHD DVR, IP NVR Recorders, Satellite Receiver,
- DVD Player HDMI Outputs are Used as Sources.
- All Settings Can Be Made with the Led Indicator and Control Keys on the Front Panel.
- Analog Output Signal Can Be Carried to the
- Desired Monitoring Points with RF Distribution Elements.
- Analog Double Side Band (DSB) Modulator

HDMI
to RF

AHD

A
CLASSFor Indoor
Use OnlyFullHD
GirişLED
EkranPLL
KontrolRF Çıkış
5-862 Mhz.

MODULATOR /AMPLIFIER

Next YE-200HD
Multiband Indoor Amplifier

eco Ready for
UHDTV

TECHNICAL SPECIFICATIONS

- Playing Content from USB Flash Memory
- High Rf Output Level
- Perfect Audio and Picture Synchronization
- RF Loop Output 5 ~ 2,200 MHz
- Video bit rate support up to 30 Mbps
- Minimum 36 dB MER (Modulation Error Rate)
- Low power consumption and Energy Saving Mode

HDMI
to RFA
CLASSFor Indoor
Use OnlyFullHD
1080p
60HzLED
EkranPLL
KontrolRF Çıkış
5-862 Mhz.

Next YE-837 HD

Multiband Indoor Amplifier

TECHNICAL SPECIFICATIONS

- 2 UHF inputs with 32dB gain and 1 VHF/FM
- Dual UHF Inputs can combine and distribute UHF broadcasts and VHF/FM sourced broadcasts coming from different directions.
- It has a long life with quality hardware.

A
CLASSFor Indoor
Use OnlyNext YE-805 PLUS
A/V Input RF Modulator

TECHNICAL SPECIFICATIONS

- Full Band (RF) Modulator with A/V Input
- Used to Convert Audio/Video Signals to RF Channels.
- Internal Type Audio-Video Input Full Band Modulator
- All Settings Can Be Made with the LED Indicator and Control Keys on the Front Panel.
- Analog Double Side Band (DSB) Modulator

HDMI
to RFA
CLASSFor Indoor
Use OnlyLED
80stergePLL
kontrol(E2/E69)
(S1/S41)


Next YE-803 HD

12V Output Modulator

TECHNICAL SPECIFICATIONS

- 12V Output Modulator
- Used to Convert Audio/Video Signals to VHF-UHF Band Channels.
- Internal Type Single Input Modulator.
- All Settings Can Be Made with the Led Indicator and Control Keys on the Front Panel.
- Analog Double Side Band (DSB) Modulator.

A
CLASSFor Indoor
Use Only

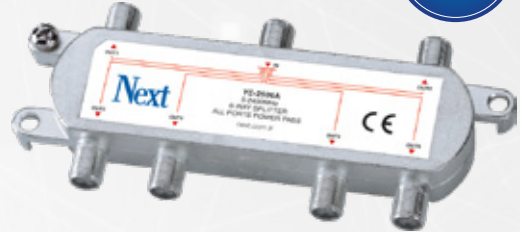SPLITTER
ALL PORTS POWER PASS**YE-2508A****8 Outputs Splitter**
(DC-PASS / IF-Band)**1/8**
5-2400
MHz**YE-2506A****6 Outputs Splitter**
(DC-PASS / IF-Band)**1/6**
5-2400
MHz**YE-2504A****4 Outputs Splitter**
(DC-PASS / IF-Band)**1/4**
5-2400
MHz**YE-2503A****3 Outputs Splitter**
(DC-PASS / IF-Band)**1/3**
5-2400
MHz**YE-2502A****2 Outputs Splitter**
(DC-PASS / IF-Band)**1/4**
5-2400
MHz**YE-2501B****1 Outputs TAP-OFF**
(-12dB)**5-2400**
MHz

TV TRI-SHIELD & COAXSIEL CABLE

YE-6401AL

TV COAXSIEL CABLE



RG6 U/6:
1.02MM CCS(21%)

NUMBER OF WIRE:
64

YE-9601AL

TRI-SHIELD TV COAXSIEL CABLE



RG6 U/4:
1.02MM CCS(21%)

NUMBER OF WIRE:
96

YE-96025AL

TV COAXSIEL CABLE



RG6 U/4:
1.02MM CCS(21%)

NUMBER OF WIRE:
96

YE-6403AL

TV COAXSIEL CABLE



RG6 U/6:
1.02MM CCS(21%)

NUMBER OF WIRE:
64

YE-96045AL

TV COAXSIEL CABLE



RG6 U/6:
1.02MM CCS(21%)

NUMBER OF WIRE:
96

Nextnet BB623

NETWORK KABLO



UTP4 CAT-6 23AWG
0.57CU+1.04PE

Nextnet BC624

NETWORK KABLO



UTP4 CAT-6 24AWG
0.51CCA+0.96PE

Gold Plus

Quattro LNBf

Input Frequency : 10.70~12.75GHz
Output Frequency : 950~2150MHz
Local Oscillator : 9.75GHz/10.60GHz
Noise Ratio : 0.1 dB




Central Control System

FullHD
1080p
4K
ULTRA-HD


RECESSED OR
SURFACE MOUNTED DESIGN

YE-4001
WALL SOCKET
ENDED

CABLE
PREPARATION



CONNECTION
SCHEME




PARAMETER	PORTS	FREQ. RANGE	SPECIFICATION
INSERTION LOSS	IN - TV IN - SAT	5 ~ 860MHz 950 ~ 2300MHz	3dB 3dB
RETURN LOSS	IN TV SAT	5 ~ 2300MHZ 5 ~ 860MHZ 950 ~ 2300 MHz	6dB 9dB 6dB
ISOLATION	TV - SAT	5 ~ 860MHZ 5 ~ 2300MHZ	19dB 14dB


YE-4002
WALL SOCKET
TRANSITIVE

RECESSED OR
SURFACE MOUNTED DESIGN

CABLE
PREPARATION



CONNECTION
SCHEME



PARAMETER	PORTS	FREQ. RANGE	SPECIFICATION
INSERTION LOSS	IN - TV IN - SAT IN - OUT	5 ~ 860MHz 950 ~ 2300MHz 5 ~ 2300MHz	10±2.5dB 10±2.5dB 4.5dB
RETURN LOSS	IN TV SAT OUT	5 ~ 2300MHZ 5 ~ 860MHZ 950 ~ 2300 MHz 5 ~ 2300MHz	6dB 9dB 6dB 8dB
ISOLATION	OUT - TV OUT - SAT	5 ~ 860MHZ 950 ~ 2300 MHz	19dB 14dB
		5 ~ 860MHZ 950 ~ 2300 MHz	22dB 15dB

NEW HYBRID SYSTEMS

HYBRID MULTISWITCH

TERMINAL & CASCADE TOGETHER



47-862MHz
150-2150MHz
500dB
500dB
500dB

Frequency Range (dB)
Frequency Range (dB)
Isolation SAT (dB)
Isolation SAT (dB)
Isolation VEB-HOT

HIGH QUALITY
SIGNAL DISTRIBUTION
SYSTEMS

Next
MULTISWITCH

Made in
Türkiye Next **YEREL**



next.com.tr

GOLD
plus

FACTORY - PRODUCTION FACILITIES



Next & NextStar

"not better, best to become owner..."



Next & NextStar

MANUFACTURER: YUKSEL ELEKTROTEKNIK SAN.TIC.LTD.STI.

Head : Battalgazi Mh. Basra Cd. No: 10~14-34935 Sultanbeyli ~ Istanbul

Branch : Halil Rifatpaşa Mah. Perpa Trade Center B Block

Floor 8 910 Okmeydanı, Sisli - İstanbul

Tel : +90 216 592 98 00 - 444 3 666 **Perpa Tel :** +90 212 320 26 50

Web : www.next.com.tr **E-Mail :** info@next.com.tr

f /next.nextstar



/nextnextstar



/next.nextstar

Next | **santral**

Next | **HOME**

Next | **Power**

Next | **LED**

Minix